



SUNBEAM®

耐震 長壽命 警示燈

航空障礙燈

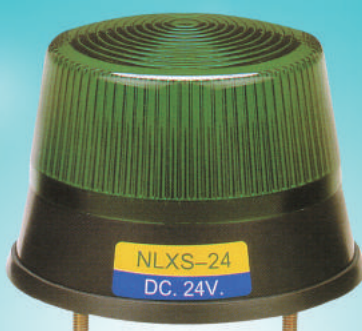

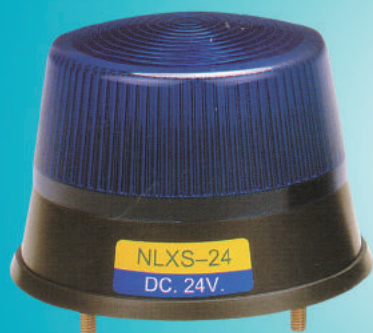

EHB series 鑽石型多角面反射鏡旋轉燈

型 式 MODEL	電 壓 VOLTAGE	電 流 CURRENT	迴轉數 FLASHING-RATE	燈 泡 BULB	重 量 WEIGHT
EHB-12	DC. 12V	4.20A	180 FPM	12V 55W (H)	2.5KG
EHB-24	DC. 24V	2.60A		24V 70W (H)	
EHB-110	AC. 120V	0.37A		130V 40W (D)	2.65KG
EHB-220	AC. 240V	0.20A		240V 40W (D)	
EHB-110H	AC. 120V	0.50A		12V 55W (H)	3.45KG
EHB-220H	AC. 240V	0.25A			

* (D) = BA15D

* (H)Halogen Bulb H1

主要特長


- 旋鈕式高級透明壓克力燈罩，不褪色，不變濁，分紅、黃、藍三色。
- 鑽石型多角面反射鏡，配合石碘碘鹵素燈泡，發揮更強烈閃光，在 2,000 公尺處即可確認，效果卓越。
- 精緻蝸式齒輪傳動結構，強勁扭力，尤其在冰天降雪地區更發揮轉動順暢。
- 長壽命型 EHB-110H 及 EHB-220H 採用大型變壓器，在電壓不穩定的地區，更加延長燈泡壽命的效果。
- 用途：警備車、消防車、大型吊車、大型工程車、建築機械、清潔車、高速公路掃道車、大型拖車、貨櫃車、鐵路電氣牽引車等。

EHB series


1. Acrylic domes are colorful & clear, being replaced without tools. Colors available in red, yellow & blue.
2. EHB type with polygon reflector and halogen bulb is an effectively heavy duty revolving light.
3. Worm gearing driving mechanism rotate extremely powerful, specially suitable in the frigid zone.
4. EHB-110H/EHB-220H type with a large-capacity transformer belongs to long life style & emits the effectual flashes. In specialty, to use them in the area of unsteady volts.

Usage:

police car, fire engine, ambulance, trolley car, garbage truck, automobile sprinkler, tractor, etc.

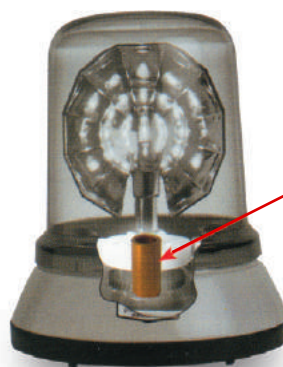

含油承軸
Oil impregnated metal

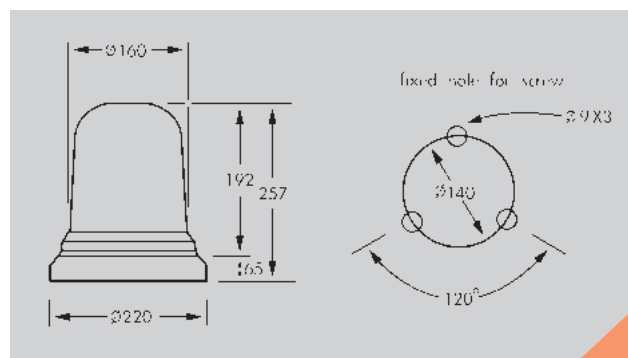

EHB-S series 全國唯一使用不鏽鋼座警示燈

型 式 MODEL	電 壓 VOLTAGE	電 流 CURRENT	迴轉數 FLASHING-RATE	燈 泡 BULB	重 量 WEIGHT
EHB-12S	DC. 12V	4.20A	180 FPM	12V 55W (H)	2.5KG
EHB-24S	DC. 24V	2.60A		24V 70W (H)	
EHB-110S	AC. 120V	0.37A		130V 40W (D)	2.65KG
EHB-220S	AC. 240V	0.20A		240V 40W (D)	
EHB-110SH	AC. 120V	0.50A		12V 55W (H)	3.45KG
EHB-220SH	AC. 240V	0.25A			

* (D) = BA15D

* (H)Halogen Bulb H1




主要特長

- ※S.....不鏽鋼底座 (SUS 304)
外型、尺寸等與 EHB 相同。
- 不鏽鋼底座 (SUS 304) 細緻光亮無比，任憑風吹雨淋，絕不生鏽。

EHB-S series

- Shape and size are the same as EHB series.
- EHB-S type has perfect corrosion proof stainless steel base, never rusting.

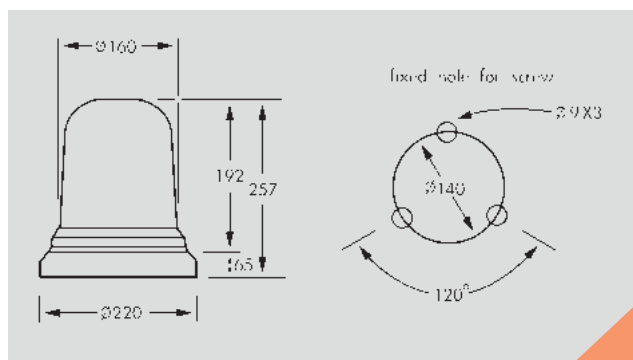

含油承軸
Oil impregnated metal

EHS series 鑽石型多角面反射鏡旋轉燈

型 式 MODEL	電 壓 VOLTAGE	電 流 CURRENT	迴轉數 FLASHING-RATE	燈 泡 BULB	重 量 WEIGHT
EHS-12	DC. 12V	4.20A	180 FPM	12V 55W (H)	1.25KG
EHS-24	DC. 24V	2.60A		24V 70W (H)	
EHS-110	AC. 120V	0.37A		130V 40W (D)	1.40KG
EHS-220	AC. 240V	0.20A		240V 40W (D)	
EHS-110L	AC. 120V	0.30A		12V 35W (S)	2.0KG
EHS-220L	AC. 240V	0.18A			

* (D) = BA15D

* (S) = BA15S

* (H)Halogen Bulb H1

主要特長

- 高級旋鈕式透明壓克力燈罩，透明清澈，色澤鮮豔，分紅、黃、藍、綠色。
- 多角面反射鏡，配襯石碘鹵素燈泡，發揮更強烈閃光效果，在 1,500 公尺處，即可確認。
- 外型輕巧、端莊，閃光數可應要求改變，革命性齒輪結構，旋轉時安靜無聲。
- 長壽命型 EHS-110L 及 EHS-220L 採用大型變壓器，在電壓不穩定的地區，更發揮延長燈泡壽命的效果。
- 用途：警備車、消防車、救護車、掃街車、垃圾收集車、灑水車、工程車等。

EHS series


1. Acrylic domes available in red, yellow, blue & green are clear & colorful, to be replaced without tools.
2. EHS type with polygon reflector and halogen bulb is an effectively heavy duty revolving light.
3. Dependable gearless drive mechanisms rotate extremely quietly. The flashing rates can be changed at customer's request.
4. EHS-110L/EHS-220L type with a large-capacity transformer belongs to long life style & emits the effectual flashes. Especially, to use them in the area of unsteady volts.

Usage:

police car, fire engine, ambulance, street sprinkler, truck.



含油承軸
Oil impregnated metal

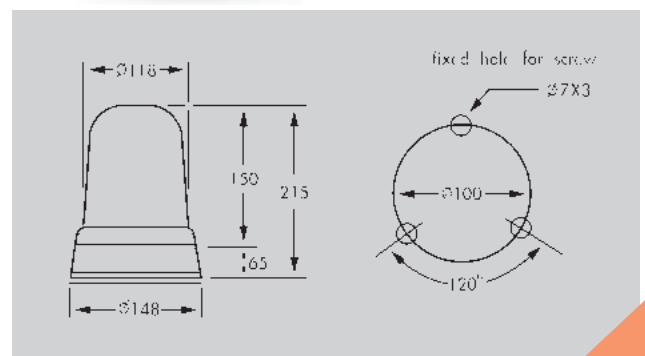

EHS-M series 鑽石型多角面反射鏡旋轉燈

型 式 MODEL	電 壓 VOLTAGE	電 流 CURRENT	迴轉數 FLASHING-RATE	燈 泡 BULB	重 量 WEIGHT
EHS-12M	DC. 12V	4.20A	180 FPM	12V 55W (H)	1.25KG
EHS-24M	DC. 24V	2.60A		24V 70W (H)	

* (H)Halogen Bulb H1

主要特長


- 外型、尺寸、電氣規格均與 EHS-12/24 相同。
底部配有四組強力磁鐵，吸、卸簡便。
- 附 4 公尺長電源導線及點菸器插頭，只要插上點菸器座，即可發揮強力警告信號。
- 用途：警備車、工程車、偵防車、救護車、堆高機。

EHS-M series

1. Shape, size & specifications are the same as EHS series.
Bottom with four magnets. Easy to operate.
2. EHS-M type with 4M power line and plug only insert into the autocigarette lighter, emitting the effective warning.

Usage:

police car, ambulance, forklift, etc.

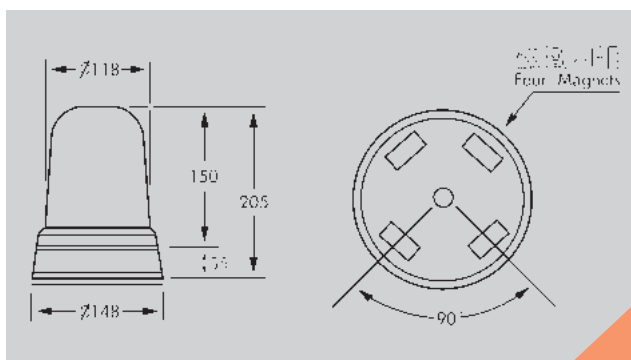

含油承軸
Oil impregnated metal

RDB series

型 式 MODEL	電 壓 VOLTAGE	電 流 CURRENT	迴轉數 FLASHING -RATE	燈 泡 BULB	音 量 PH(1M)	重 量 WEIGHT
RDB-12	DC. 12V	1.0A	140 FPM	12V 10W (S)	80db	1.25KG
RDB-24	DC. 24V	0.55A		24V 10W (S)		
RDB-110	AC. 120V	0.11A		12V 8W (S)		1.40KG
RDB-220	AC. 240V	0.06A				

* (S) = BA15S

主要特長


- 結合警示燈與警報器於一體，充分發揮聲、光效果。
- 流線造型，式樣精巧優美，用途廣泛。
- 全包覆式燈罩，底座設螺紋結合，拆、卸簡便。
- 耐候性強的透明壓克力燈罩，分紅、黃、綠、藍。
- 用途：車輛出入口，工廠危險區域。保全設施、銀行、銀樓防搶劫、社區防盜、家戶防盜、機關、學校、大樓緊急警示、呼叫。

RDB series

1. The alarm is contained inside the light.
2. The shape of the light is excellent and multipurpose.
3. It is easy to assemble the dome and base, without tool.
4. Material of dome is acrylic resin with weather-proof. Colors available in red, yellow, green and blue.

Usage:

Emergency signal for Parking exit, Dangerous area in working, Security, Bank, Home, Community, School, High-building, etc.

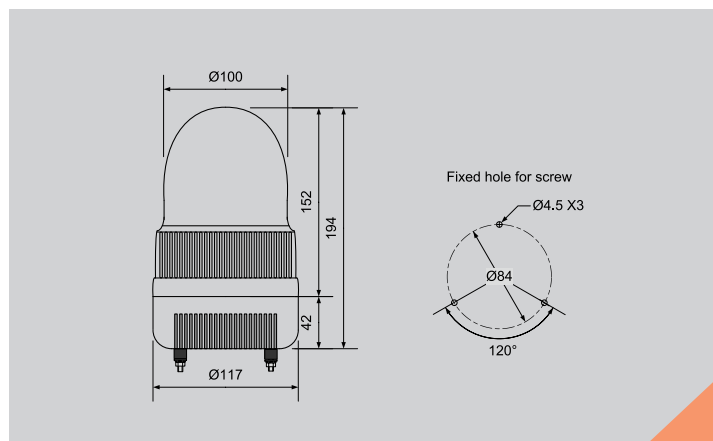

RD/RD-M series

型 式 MODEL	電 壓 VOLTAGE	電 流 CURRENT	迴轉數 FLASHING-RATE	燈 泡 BULB	重 量 WEIGHT
RD-6/RD-6M	DC. 6V	1.7A	140 FPM	6V 10W (S)	0.39 / 0.50KG
RD-12/RD-12M	DC. 12V	0.85A		12V 10W (S)	
RD-24/RD-24M	DC. 24V	0.42A		24V 10W (S)	0.39KG
RD-24AC	AC. 24V	0.42A			
RD-110	AC. 120V	0.07A		12V 8W (S)	0.64KG
RD-220	AC. 240V	0.04A			

"M" Bottom with Magnet

*(S) = BA15S

主要特長

- 全包覆式燈罩，底座設螺紋與底座結合，無須螺絲固定，裝、卸簡便。
- 流線式造型，式樣精巧優美，用途廣泛。
- 耐候性強的透明壓克力燈罩，分紅、黃、藍、綠、紫色。
- “M”型底座附三組強力磁鐵，吸、卸簡便。附 4M 電源導線及點菸器插頭。
- 另有特殊用途的 AC 24V 規格供選擇。



RD series

1. Acrylic domes are weatherproof & easy to replace without tools. Colors available in red, yellow, blue, green & purple.
2. Bottom with three round magnets for RD-M, easy to install.
3. RD-M type with 4M power line and cigarette plug.
4. To have option on AC. 24V by request.



CE



RD



RD-M



SBFM-M/SBFM-MH series (橡膠底座)

型 式 MODEL	電 壓 VOLTAGE	電 流 CURRENT	迴轉數 FLASHING-RATE	燈 泡 BULB	重 量 WEIGHT
SBFM-12M	DC. 12V	3.0A	180 FPM	12V 35W (S)	1.56KG
SBFM-24M	DC. 24V	1.9A		24V 60W (S)	
SBFM-12MH	DC. 12V	4.6A		12V 55W (H)	
SBFM-24MH	DC. 24V	2.9A		24V 70W (H)	

* (S) = BA15S

* (H)Halogen Bulb H3

主要特長

- 外型依風阻係數最小原理而設計，式樣奇特優美，燈罩分紅、黃、藍三色。
- 革命性無齒輪結構，旋轉時安靜無聲。
- 大型反射鏡，光亮無比，無論濃霧或大雨天氣，都能看見強力閃光，發揮卓著效果。
- 底部設橡膠底座，內含二組大型環形磁鐵，吸力特強，其特點為絕不刮傷車體烤漆。
- 高速行駛（時速 150 公里以上）或顛簸路面，絕無脫落之虞。
- 附電源導線長 4 公尺及點煙器插頭，只要插上點煙器座，即可發揮強力警告信號。
- 用途：偵防車、警備車、巡邏摩托車、工程車、車輛拋錨警告。

SBFM-M/SBFM-MH series

1. Streamline domes are designed as per the minimum wind resistance. Colors available in red, yellow & blue.
2. Dependable gearless drive mechanisms rotate extremely quietly.
3. In the foggy or rainy days, the big parabolic reflector produces maximum beam candlepower.
4. Bottom with two big round magnets, covered by rubber base. In specialty, no scrape for car's painting.
5. Never come loose when driving up to 150KM/hr.
6. SBFM-M/SBFM-MH type with 4M power line and plug only insert into the autocigarette lighter, emitting the effective warning.


※ The spiral lines are available by request.

Usage:

unmarked car, volunteer police, police motorcycle, etc.



↑
(橡膠底座)
(Rubber base)

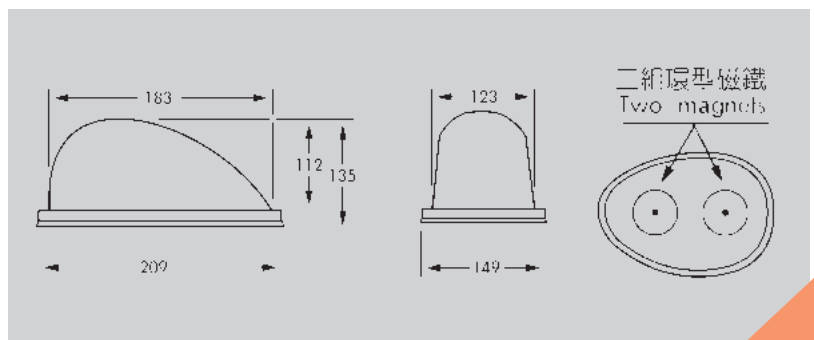

SAM-M series (橡膠底座)

型 式 MODEL	電 壓 VOLTAGE	電 流 CURRENT	迴轉數 FLASHING-RATE	燈 泡 BULB	重 量 WEIGHT
SAM-12M	DC. 12V	1.7A	100 FPM	12V 20W (S)	0.74KG
SAM-24M	DC. 24V	0.8A		24V 20W (S)	0.75KG

* (S) = BA15S

主要特長

- 橢圓流線造型，示樣精巧，分紅、黃、綠、藍色。
- 無齒輪設計，由馬達直接驅動，安靜無聲。
- 唯底部改置一組大型環形磁鐵，吸著力大幅增加，以橡膠座襯墊，絕不刮傷車體表面。
- 附 4 公尺電源導線及點煙器插頭。
- 用途：車輛故障標誌、工程車標示、警用摩托車等。

SAM-M series



1. Streamline domes are designed excellently. Colors available in red, yellow, blue & green.
2. Dependable gearless drive mechanisms rotate extremely quietly.
3. Bottom with one big round magnet, covered by rubber base. No scrape for car's painting.
4. SAM-M type with 4M power line & cigarette plug.
 - ※ The spiral lines are available by request.

Usage:

police motorcycle, the sign for out-of-work of cars, etc.



(橡膠底座)
(Rubber base)

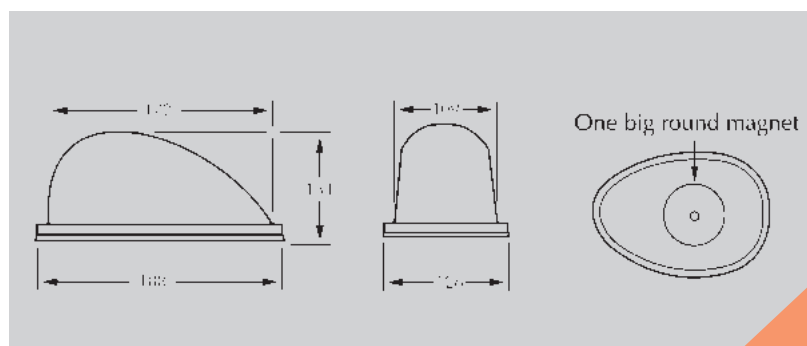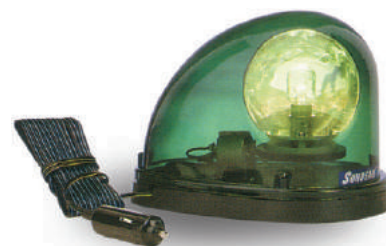

NLXS series 小型爆閃燈

型 式 MODEL	電 壓 VOLTAGE	電 流 CURRENT	迴轉數 FLASHING -RATE	發光體 BULB	重 量 WEIGHT
NLXS-12	DC. 12V	0.22A	100 FPM	Xenon Tube	75gm
NLXS-24	DC. 24V	0.1A			
NLXS-110	AC. 120V	30mA			
NLXS-220	AC. 240V	25mA			




特長

- 燈罩經特殊高效率折射設計，可將光源折射擴大，耀眼且亮度均勻。
底座為高級塑鋼，耐酸、鹼及海水淋灑。
- 用途：適用各種車輛、車體、消防、防盜、機械等警示，及招牌、看板的標示。

1. **Dome:** with effective refractive design. It can enlarge the light power and spark the bright glare.
2. **Base :** with compact, corrosion-resistance & rainproof.

Usage:

1. Suitable as the auxiliary beacon for assorted vehicle.
2. Warning for fire or burglar alarm in high-rise.
3. Warning for assorted machinery.
4. Suitable for signboard.

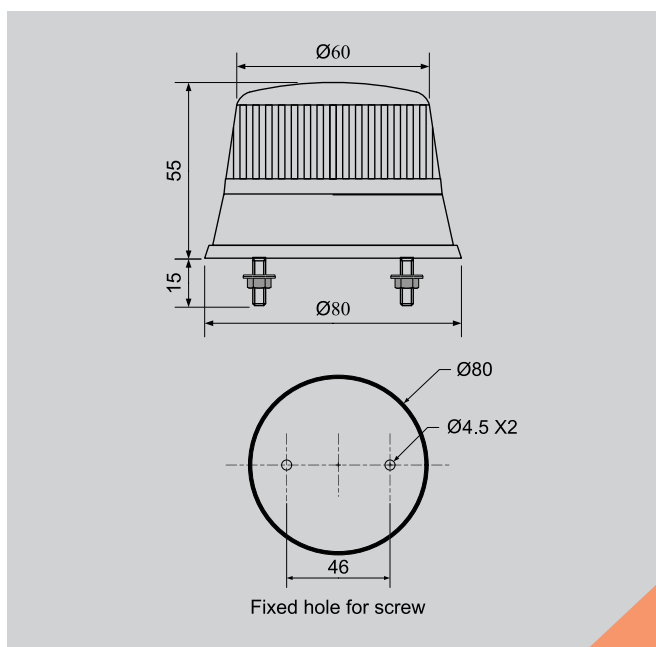

XS / XS-M / XSD / XSD-M series

爆閃警示燈 / 雙爆閃警示燈

型 式 MODEL	電 壓 VOLTAGE	電 流 CURRENT	迴轉數 FLASHING -RATE	發光體 BULB	備 註 REMARKS	重 量 WEIGHT		
XS-12	DC. 12V	400mA	100 FPM	Xenon Tube		260gm		
XS-24	DC. 24V	200mA						
XS-110	AC. 120V	50mA						
XS-220	AC. 240V	60mA						
XS-12M	DC. 12V	400mA			MAGNETIC MOUNT WITH 4M CORD & CIGARETTE PLUG	490gm		
XS-24M	DC. 24V	200mA						
XSD-1224M	DC.12-24V	MAX. 700mA @DC. 12V	DOUBLE 80 FPM			520gm		
XSD-1224						290gm		




燈罩：耐衝擊聚碳酸酯〈polycarbonate〉俗稱 PC 有紅、黃、藍及透明。

底座：耐衝擊高級塑鋼，黑色〈或其他顏色〉。


1. Polycarbonate dome : available in red, yellow, blue & clear.
2. ABS base : available in black (standard). Other colors are custom-made depending on quantity.



XS / XSD

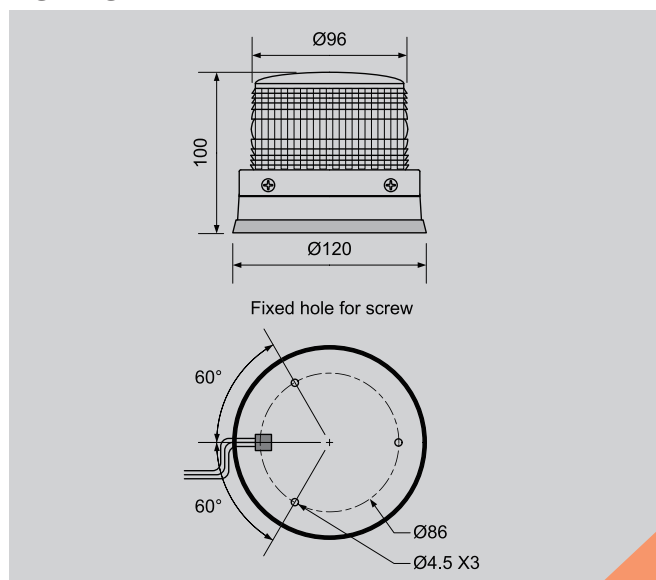

XS-M / XSD-M

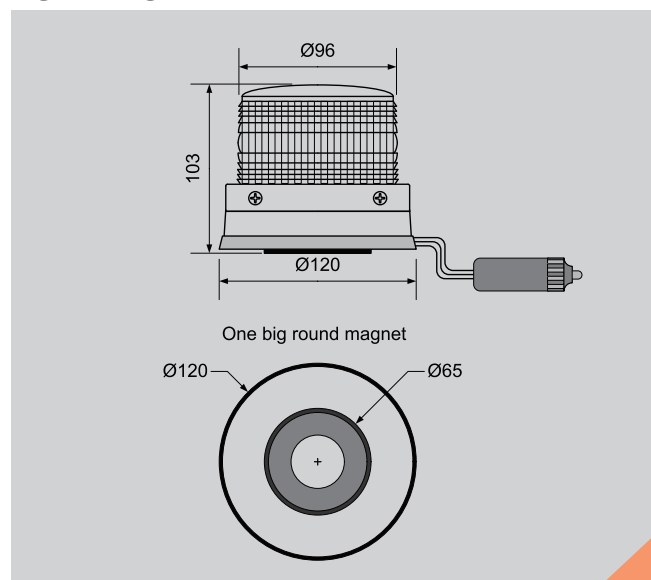



HIGH BRIGHT LED FLASHING LIGHT

高亮度LED閃光警示燈

HIGH BRIGHT LED FLASHING LIGHT

高亮度 LED 閃光警示燈

型 式 MODEL	電 壓 VOLTAGE	消耗功率 POWER	閃光次數 FLASHING-RATE	重 量 WEIGHT	備 註 REMARKS
DB-1224	12-24VDC	12W.	1.Single Flash:80FPM	0.8kgs	WITH BOLT BASE
DB-1122	100-260VAC 50-60Hz		2.Double Flash:85FPM	0.9kgs	
DB-1224M	12-24VDC		3.Tri-Flash:85FPM	1.7kgs	WITH MAGNET BASE AND PLUG
			4.Multi-Flash:75FPM		
			5.Rotating:95FPM		
			6.Cycle Flash		

〈附註〉DB-1224M底座附強力磁鐵及點菸器插頭

IP 67




主要特長


- 高亮度LED，光度特亮，閃光頻率穩定。
- 創新折條紋燈罩，可將光線完美折射，任何角度均能發揮高度警示效果。
- 燈罩有紅、黃、藍三種顏色，採用耐衝擊PC材質，全天候風吹、雨淋、日曬均不變質。
- 底座附強力磁鐵，可強吸車頂，高速行駛也不脫落。
- 附4公尺彈簧電源線及點菸器插頭。

LED FLASHING LIGHT


1. The lights with high bright LED and steady flashing frequency.
2. Dome: with effective refractive design. To enlarge the light source to achieve better effects of warning.
3. Material of dome and base is polycarbonate with compact and water-proof. Colors available in red, yellow and blue.
4. DB-1224M: with magnetic base. To be suitable at high-speed when driving vehicles.
5. The light with 4M spiral line and plug.
6. 2-year warranty.



DB 尺寸圖

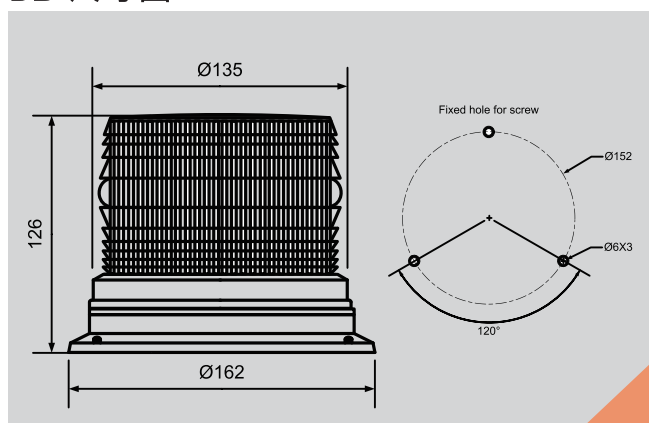

DB-M 尺寸圖

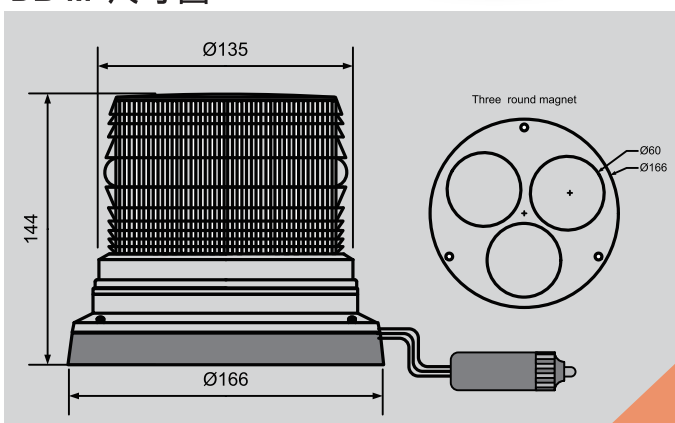

LED FLASHING LIGHT

LED 閃光警示燈

型 式 MODEL	電 壓 VOLTAGE	電 源 POWER	重 量 WEIGHT
RA-6M	DC. 6V	3 號乾電池四個 USE AA (UM-3) DRY BATTERY 4 PCS	0.4KG




主要特長

- LED 光源，壽命超長，可達 100,000 小時以上。超省電，四個 3 號電池可連續點燈 72 小時以上。
- 適用於無電源的場所。
- 螺旋式透明 PC 燈罩，耐衝擊，風吹、雨淋、日曬不變質脆裂。
- PC 底座內附二個強力磁鐵，吸力強，脫、著簡易。

LED DRY CELLS TYPE WITH MAGNETIC BASE

1. The LED lights are designed for energy-saving. To use 4 pcs of 'AA' dry cells, it may continuously operate about 72 hours.
2. Especially suitable in the place of NO power source.
3. Material of dome is polycarbonate with compact and weather-proof. Colors available in red, yellow and blue.
4. Polycarbonate base with two of powerful magnets, easy to install.

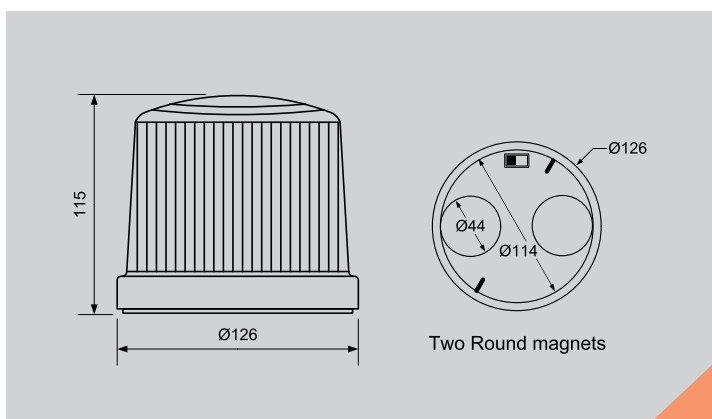

RX / RX-H series

型 式 MODEL	電 壓 VOLTAGE	電 流 CURRENT	迴轉數 FLASHING RATE	燈 泡 BULB		重 量 WEIGHT
				自然燈泡 Incandescent	石礫燈泡 Halogen	
RX-12	DC. 12V	2.90A	180 FPM	12V 35W (S)	-----	1.33KG
RX-24	DC. 24V	2.5 A		24V 60W (S)	-----	
RX-110	AC. 120V	0.26A		12V 35W (S)	-----	2.12KG
RX-220	AC. 240V	0.15A		-----	-----	
RX-12H	DC. 12V	4.60A		-----	12V 55W (H)	1.33KG
RX-24H	DC. 24V	2.92A		-----	24V 70W (H)	
RX-110H	AC. 120V	0.42A		-----	12V 55W (H)	2.18KG
RX-220H	AC. 240V	0.23A		-----	-----	

* (S) = BA15S

* (H)Halogen Bulb H3

主要特長

- 螺旋式透明燈罩，耐候性強，防水性絕佳，分紅、黃、藍、綠色。
- 高級塑鋼底座，耐酸鹼及海水。
- 雙面反射鏡，表面真空電鍍處理，光亮無比，閃面確實，發揮強力警告信號。
- 用途：各種特種車輛、船舶、警艇、車輛出入口、工廠危險區域、招牌廣告。

RX/RX-H series

1. Acrylic domes are waterproof available in red, yellow, blue & green.
2. ABS resin bases endure chemical corrosion and impact.
3. The dual, symmetrical & back-to-back reflector is coated by vacuum evaporated aluminum coating. It emits powerful beams.
4. RX-110/220 & RX-110H/220H type with a large-capacity transformer are long life and suitable for the area of unsteady volts.

Usage:

Stage light, tractor, forklift, signboard, conveyer, etc.




CE



SPECIAL SPECIFICATION:

- a. AC. 24V
- b. AC. 100V
- c. DC. 48V
- d. DC. 100V

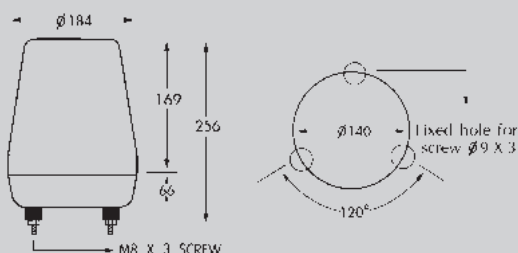

RA series

型 式 MODEL	電 壓 VOLTAGE	電 流 CURRENT	迴轉數 FLASHING-RATE	燈 泡 BULB	重 量 WEIGHT
RA-12	DC. 12V	0.85A	150 FPM	12V 20W (S)	0.58KG
RA-24	DC. 24V	0.42A		24V 20W (S)	
RA-110	AC. 120V	0.1A		130V 20W (D)	0.64KG
RA-220	AC. 240V	0.05A		240V 20W (D)	
RA-110L	AC. 120V	0.2A		12V 20W (S)	1.10KG
RA-220L	AC. 240V	0.1A			

* (D) = BA15D

* (S) = BA15S

主要特長


- 螺旋式透明燈罩，防水性絕佳，分紅、黃、藍、綠四色。
- 高級塑鋼底座，耐酸鹼及海水浸泡。
- 強力小型精密馬達傳動，耗電極省，壽命長，可連續使用 1,000 小時以上。
- 用途：車輛、工程現場、車輛出入口、工廠危險區、機械操作、緊急電話亭標示及招牌廣告等。

RA series

1. Domes are waterproof available in red, yellow, blue & green.
2. ABS base is corrosion-resistance.
3. Mini-motors can drive over 1,000 hours for lasting use, being electricity-saving

Usage:

Working site, parking exits, machine operating, signboard, etc.

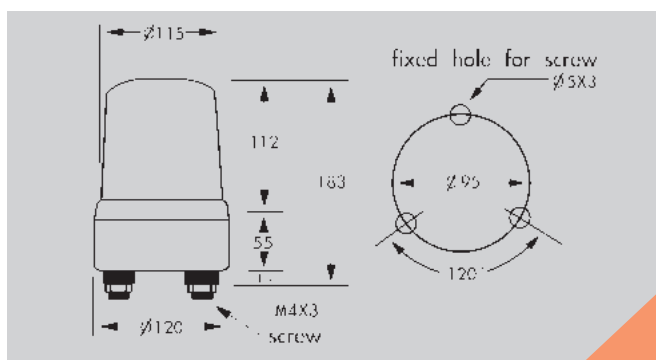

RM series

型 式 MODEL	電 壓 VOLTAGE	電 流 CURRENT	迴轉數 FLASHING-RATE	燈 泡 BULB	重 量 WEIGHT
RM-6	DC. 6V	1.67A	140 FPM	6V 10W (S)	0.48KG
RM-12	DC. 12V	0.83A		12V 10W (S)	
RM-24	DC. 24V	0.42A		24V 10W (S)	
RM-110	AC. 120V	0.07A		12V 8W (S)	0.60KG
RM-220	AC. 240V	0.04A			

* (S) = BA15S

主要特長


- 螺旋式透明燈罩，免用工具即可啓、卸；防水性極佳，分紅、黃、藍、綠色。
- 小型、輕巧、簡便多用途，適合各種場合使用。
- 用途：
 - 凡小型車輛、電力、電信、瓦斯之管線鋪設現場。
 - 各種自動機械、工作母機、輸送帶之注意標示。
 - 配電盤、自動控制盤標示。
 - 遊樂器具之裝置。
 - 公共場所、大樓安全門引導標示。

RM series

1. Domes are replaced without tools and waterproof, colors in red, yellow, blue & green.
2. It is small, simple & multipurpose to be suitable for assorted conditions.

Usage:

Signals for robot, distributor, exits, machine game, etc.

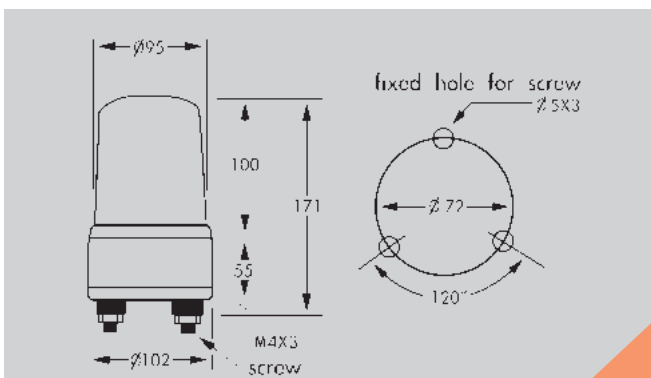

TM-15D series LED 高級航空障礙燈

型 式 MODEL	電 壓 VOLTAGE	燈泡座 SOCKET	燈 罩 LENS	顏 色 COLOR	底 座 BASE	重 量 WEIGHT
TM-15D	AC. 100V AC. 240V	E27 瓷座	GLASS 玻璃	RED 紅色	Stainless steel 不鏽鋼	1.52KG

主要特長


- 紅色耐熱濾光折射玻璃燈罩，所有外部金屬部分全部用不鏽鋼（#304）材料成型。
- 保護網附三個邊釦，方便替換燈泡。
- 底座附固定孔，以便安裝。
- 用途：一般高樓，鐵塔，煙囪，瓦斯槽，機場，建築工地吊車。

TM-15D series

1. Red heatproof refractive glass lens is covered with stainless steel protective net.
2. Material of base is stainless steel SUS 304 covered by painting.
3. The stainless steel protective net with three buckles, easy to replace bulbs.
4. To has the fixed holes in bottom for installing.

Usage:

High-rise, the tower, stack, gas tank, airport, etc.

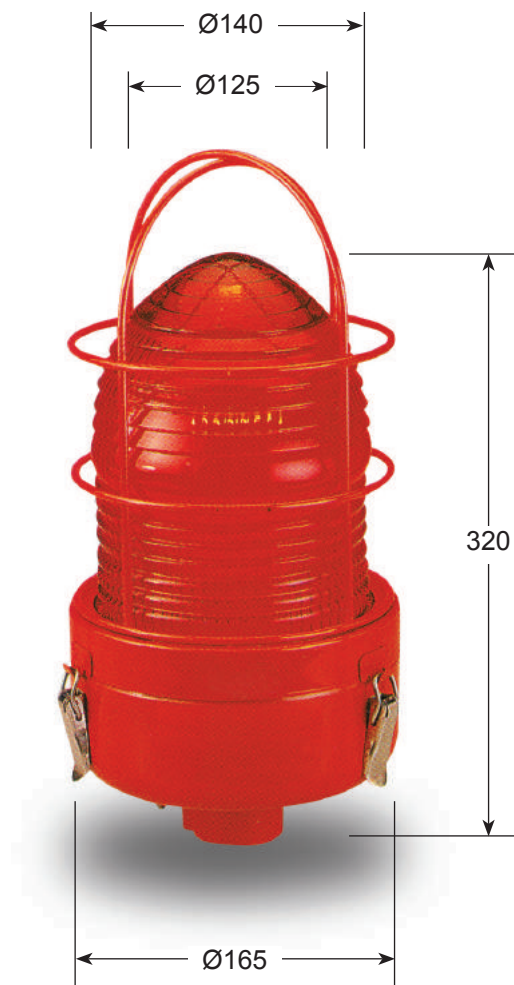



- 因本公司的產品不斷從事開發改良，若依照本公司的標準化產品稍作尺寸、式樣及構造等修改，不另通知。

Due to continuous development and improvement and improvement for our products, specifications and all offerings are subject to change without notice in accordance with **MAXIM INC.** standard terms and conditions.



SUNBEAM® MAXIM INC.

NO. 39. WAN-TA ROAD
TAIPEI TAIWAN
明 誼 股 份 有 限 公 司

台 北 市 萬 大 路 3 9 號
TEL: 886-2-2306-5081
FAX: 886-2-2306-6835
E-mail: maximinc@ms22.hinet.net
<http://www.maximinc.com.tw>

